

SPECIFICATION

for

SWITCHING POWER SUPPLY

M/N : SNP-D129

Reviewed by Project Manager	J. Chang 042602	J. Chang 12/1/02	J. Chang 061703	鍾煒煜 10/22/08	鍾煒煜 11-7-08	
Typed by Document Assistant	林錦遠 042502	林錦遠 12/1/02	林錦遠 061703	黃羿穎 10/22/08	黃羿穎 11/07/08	
SKYNET ELECTRONIC			LAST REV. NO.			

1.0 INTRODUCTIONS

The SNP-D129 is an AC-DC switching power supply with universal input, adjustable single output, 120W continuous output power, which is designed for Din-Rail application.

2.0 INPUT SPECIFICATIONS

2.1 Input Voltage

The range of input voltage is from 90VAC to 264VAC.

Nominal line is 115VAC(60Hz) / 230VAC(50Hz).

2.2 Input frequency

The range of input frequency is from 47Hz to 63Hz.

2.3 Input current

The maximum input current is 2A at 115VAC or 1A at 230VAC.

2.4 Inrush current

The inrush current will not exceed 30A at 115VAC input or 60A at 230VAC input.

3.0 OUTPUT SPECIFICATIONS

3.1 Load range

output	min. load	rated load	max. load	voltage accuracy
+24V	0A	5A	6A	+ -2%

At factory, in 60% rated load and nominal line condition, the +24V output is checked to be within the specified voltage accuracy range.

The output voltage could be adjustable from 23 ~ 28VDC.

The max. load could deliver 60 seconds min.

The total continuous output power shall be kept within 120W.

3.2 Ripple and noise

The peak to peak ripple and noise for the output is less than 40mVpp at rated load and nominal line. Measuring is done by 15MHz band width limited oscilloscope and terminated the output with a 0.47uF capacitor.

3.3 Line regulation

The line regulation is less than + -1% while measuring at rated load and + -10% of nominal line input voltage changing.

3.4 Load regulation

The load regulation for +24V is less than + -1%, which is measured by changing the measured output load from 0% to 100% of rated load, 115/230VAC.

4.0 GENERAL FEATURES

4.1 Efficiency

The efficiency is 87% typical at rated load, nominal line.

4.2 Hold up time

The hold up time is longer than 20mS at 115VAC input, rated load which is measured from the end of the last charging pulse to when the main output drops down to 95% of output voltage.

4.3 Protection

4.3.1 Over voltage protection

For some reason the power supply fails to control itself, the build-in over voltage protection circuit will shut down the output to prevent damaging external circuits. The trip point is 29V~34V.

4.3.2 Short circuit & over load protection

The power supply will go into hiccup mode against short circuit or over load conditions, and will auto-recovery while faulty conditions are removed.

4.4 Startup delay

1.7 sec typ. nominal line, rated load (counted from Input ON).

4.5 Front panel indicator

Green LED, goes out at $V_{out} < 15V$.

4.6 MTBF

260,000h at 24VDC/5A, 230VAC input, 40°C according to MIL-HDBK 217F(GB)


5.0 ENVIRONMENT SPECIFICATIONS

5.1 Operating temperature

-10°C to +70°C (>60°C : derating, 3W/K)

At work, it needs 10 cm convection space from the top ventilation hole to the other object, and 3 cm convection space from the bottom ventilation hole to the other object.

5.2 Derating curve

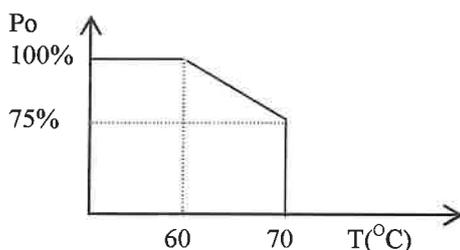

5.3 Storage temperature

-40°C to 85°C

5.4 Altitude

Will operating properly at any altitude between 0 to 10000 ft.

6.0 INTERNATIONAL STANDARDS

6.1 Safety standards

Designed to meet the following standards :

UL 1950

UL 508

CSA 22.2 NO. 950-M90

EN 60 950

6.2 EMC standards

6.2.1 EMI standards

Designed to meet the following limits :

FCC docket 20780 curve "B"

EN 55022 "B"

EN61000-3-2 Class D

EN50081-1

6.2.2 EMS standards

EN50082-2

EN61000-4-2 8KV contact discharge, 15KV air discharge Criteria A

EN61000-4-3 10V/m with 80% AM Criteria A

EN61000-4-4 2KV Criteria A

EN61000-4-5 4KV Criteria A

EN61000-4-6 10V/M with 80% AM Criteria A


EN61000-4-8 1A/M Criteria A

EN61000-4-11 30% dips 10ms Criteria A

60% dips 100ms Criteria C

95% dips 5000ms Criteria C

7.0 MECHANICAL SPECIFICATION

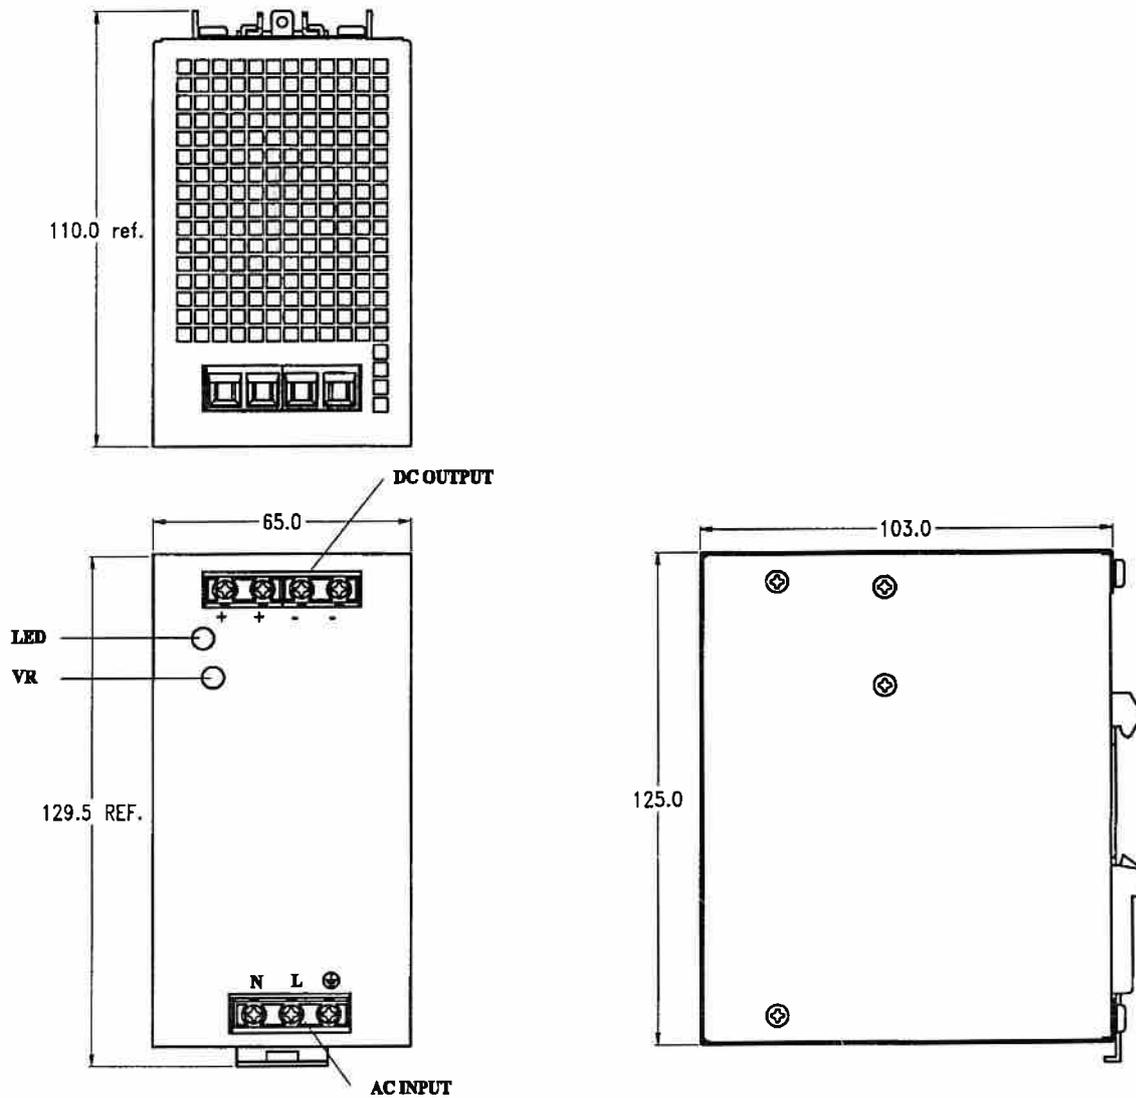

7.1 Dimensions

Dimensions shown in mm as above. Tolerance specified is + -0.8mm.

7.2 Connectors

AC & DC Connector : Terminal blocks (suitable wire 26~10AWG, wire strip length 6~7mm)

7.3 Power on indicator


Green light on the panel

7.4 Hook


Hook : For 35mm wide rail.

8.0 PERFORMANCE (input voltage is 115VAC, unless others specified)


8.1 Switching frequency ripple

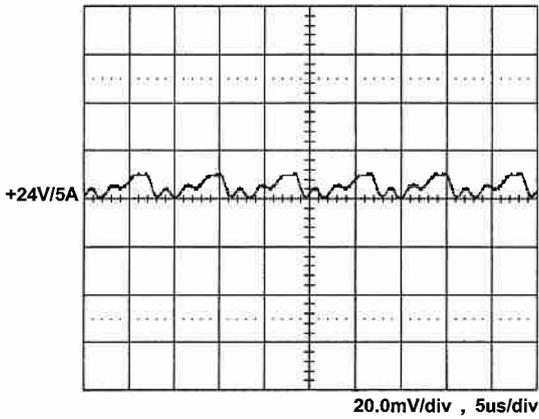


8.2 Line frequency ripple

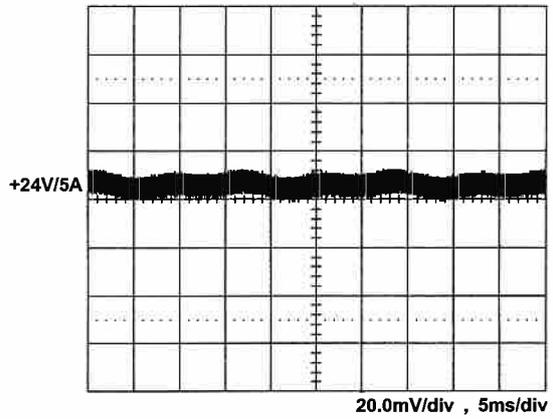


8.3 Output turn on wave form

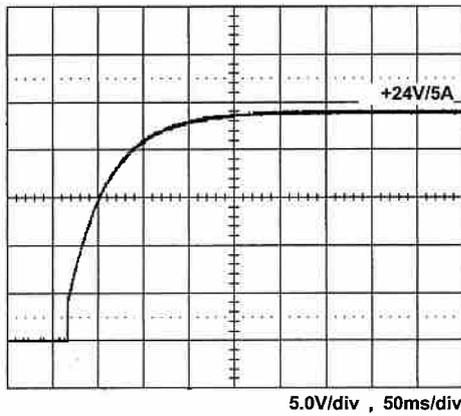


8.4 Output turn off wave form

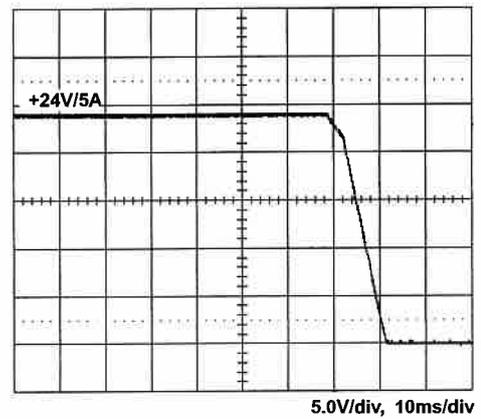


8.5 Hold-up time

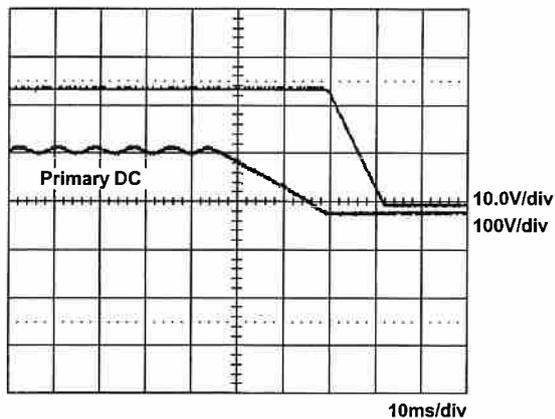

8.6 Over voltage protection

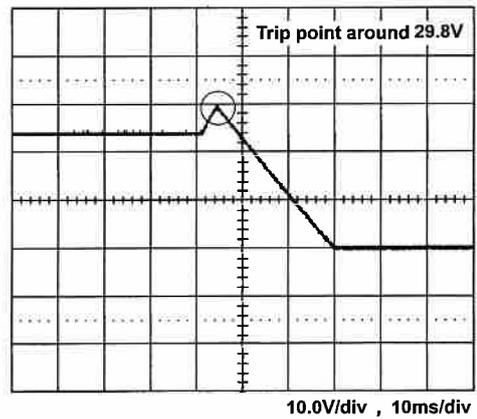


8.7 +24V step response

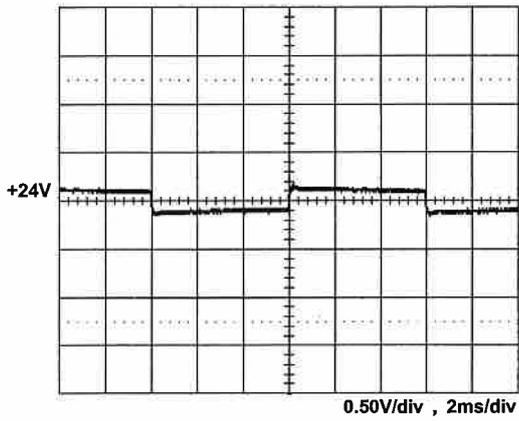

+24V step from 1A to 5A

8.8 FCC B performance

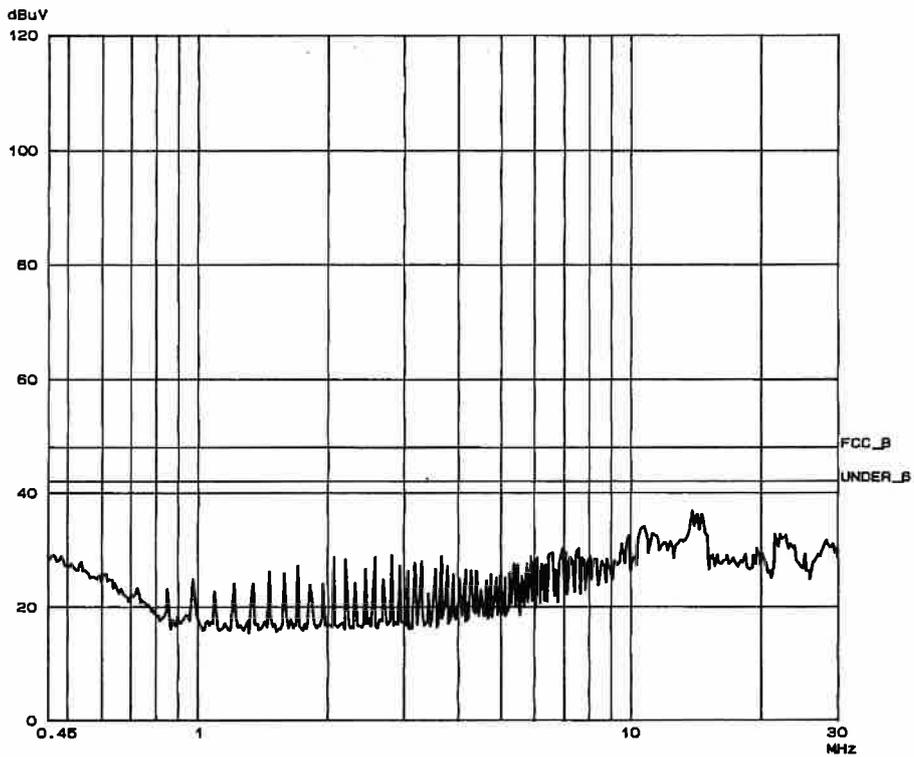

8.9 EN 55022 B

