

**SPECIFICATION**

and

**PERFORMANCE**

for

SWITCHING POWER SUPPLY

**M/N : SNP-Y077**

Reviewed by Project Manager	梁錫亮 7-18-03	鍾煒煒 12-16-07	鍾煒煒 4-14-09	鍾煒煒 5-25-09	Carl 2-12-18	
Typed by Document Assistant	黃翠穎 07/20/05	黃翠穎 12/15/08	黃翠穎 04/14/09	黃翠穎 05/25/09	蕭瑞英 02/12/19	
SKYNET ELECTRONIC			LAST REV. NO.			

## 1.0 INTRODUCTIONS

SNP-Y077 is a 70W dual output and universal input switching mode power supply. It's designed for IT, industrial and medical applications. Low density, low profile, high efficiency and high reliability are the basic features.

## 2.0 INPUT SPECIFICATIONS

### 2.1 Input Voltage

The range of input voltage is from 90VAC to 264VAC, nominal line is 115VAC/230VAC. (Label 100 ~ 240VAC)

### 2.2 Input Frequency

The range of input frequency is from 47Hz to 63Hz.

### 2.3 Input Current

The maximum input current is 2A at 115VAC or 1A at 230VAC.

### 2.4 Inrush Current

The inrush current will not exceed 30A at 115VAC input or 60A at 230VAC input cold start, 25°C.

## 3.0 OUTPUT SPECIFICATIONS

### 3.1 Load range

output	min. load	rated load	peak load	voltage accuracy
+12V	0A	5.6A	9A	11.88V to 12.12V
+5V	0A	0.5A		4.75V to 5.25V

At factory, the +12V output is set between +11.88V to +12.12V at 60% rated load and nominal line input, and the other outputs should be checked within the accuracy range. Peak load can be supplied 8 seconds typ. at nominal line while others at rated load.

### 3.2 Ripple and noise

The peak to peak ripple and noise for each output is less than 1% of each output voltage at rated load, nominal line. Measuring is done by 15MHz bandwidth limited oscilloscope and terminated each output with a 0.47uF capacitor.

### 3.3 Line regulation

The output line regulation, for all outputs are less than + -1% while measuring at rated load and + -10% of nominal line input voltage changing.

### 3.4 Load regulation

The load regulation for +12V is less than + -1%, for +5V is less than + -1%, which are measured by changing the output load + -40% from 60% rated load, and the other outputs are kept at 60% rated load and nominal line input.

## 4.0 GENERAL FEATURES

### 4.1 Efficiency

The efficiency is 81% typ. while measuring at nominal line and rated load.

### 4.2 Hold up time

The hold up time is longer than 20mS at 115VAC input and rated load, which is measured from the end of the last charging pulse to when the main output drops down to 95% output voltage.

### 4.3 Protection

#### 4.3.1 Over voltage protection

The built-in crowbar circuit will shut down the outputs to avoid damaging the external circuits. The trip point of over voltage protection is around +13.1V to +15.1V. To recover from over voltage protection, cycle the AC line OFF and ON is necessary.


#### 4.3.2 Short circuit and over load protection

The power supply will generate a hiccup mode to protect itself against short circuit or over load conditions, and will automatically return to normal after fault conditions are removed.

## 5.0 ENVIRONMENT SPECIFICATIONS

### 5.1 Operating temperature

0°C to 70°C (>50°C with derating as below.)

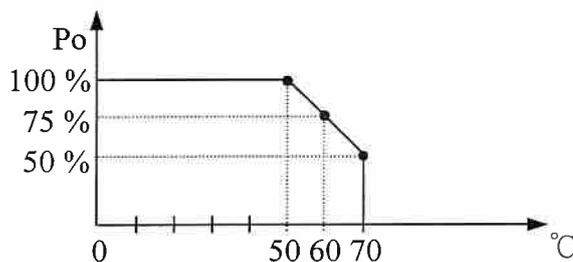

### 5.2 Storage temperature

-40°C to +75°C

### 5.3 Operating humidity

10% to 90% Non-Condensing.

### 5.4 Altitude

Will operate properly at any altitude between 0 to 10000ft.

## 6.0 INTERNATIONAL STANDARDS

### 6.1 Safety standards

Designed to meet the following regulations :

UL 60950

CSA 22.2 NO.234

EN 60950

UL2601

CSA 22.2 NO.601.1

EN 60601-1

### 6.2 EMI standards

Designed to meet the following limits :

FCC docket 20780 curve "B"

EN55011 class "B"


EN61000-3-2 class "A"

### 6.3 EMS standards

Designed to meet the following limits :

EN61000-4-2	8KV contact, 15KV air discharge	Criterion A
EN61000-4-3	10V/M with 80% AM	Criterion A
EN61000-4-4	4KV	Criterion A
EN61000-4-5	Line to Line 2KV ; Line to ground 2KV.	Criterion A
EN61000-4-6	10V with 80% AM	Criterion A
EN61000-4-8	30A/M	Criterion A
EN61000-4-11	30% dips 500ms,	Criterion A
	60% dips 200ms,	Criterion B
	100% dips 10ms,	Criterion A
	100% dips 5000ms,	Criterion B
	100% dips 20ms,	Criterion B

7.0 MECHANICAL SPECIFICATION

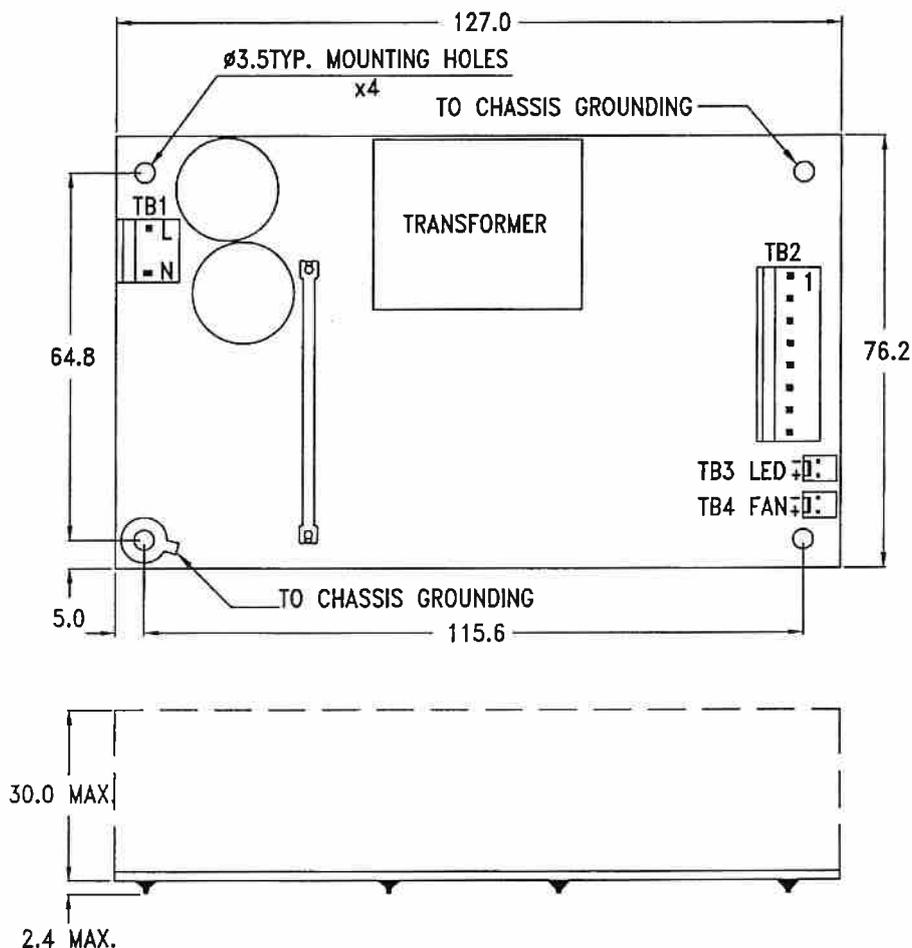

7.1 Dimensions

Dimensions shown in mm as above. Tolerance specified is + -0.4mm.

7.2 Connectors

- TB1--AC Input : Molex 5277-02A or equivalent
- TB2--DC output : Molex 5273-08A or equivalent
- TB3 for LED use only : Molex 5045-02A or equivalent
- TB4 for FAN use only : Molex 5045-02A or equivalent

7.3 DC output pin assignment


PIN	1.	+12V	5.	GND
	2.	+12V	6.	GND
	3.	+12V	7.	GND
	4.	GND	8.	+5V

7.4 Packing


- Net weight : 210 g approx. / unit
- Carton size (mm) : 397 (L) x 339 (W) x 327 (H)
- Quantity : 48 units / carton
- Gross weight : 12.5 kg approx. / carton

8.0 PERFORMANCE (input voltage is 115VAC, unless others specified)


8.1 Switching frequency ripple

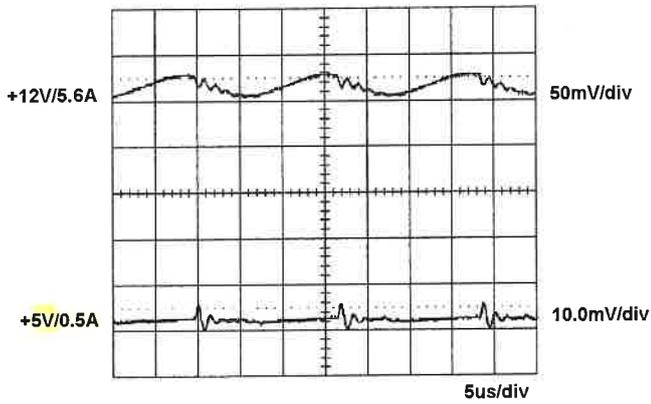


8.2 Line frequency ripple

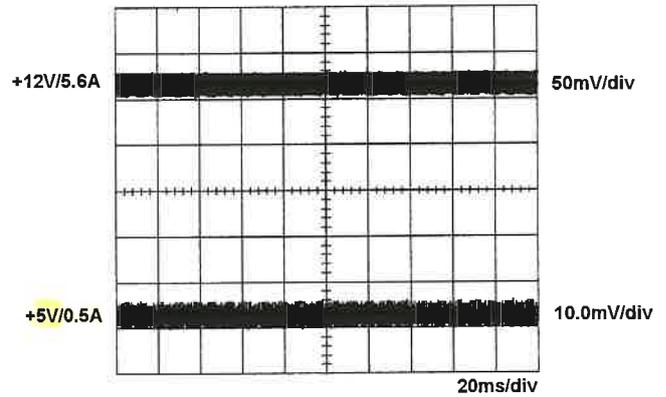


8.3 Output turn on wave form

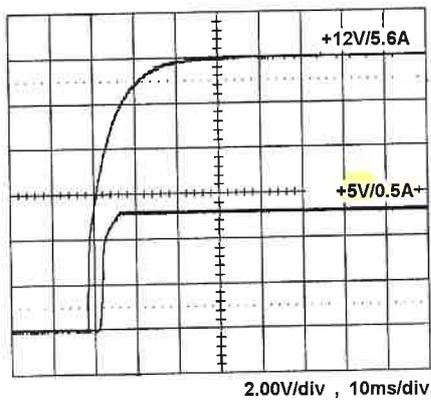


8.4 Output turn off wave form

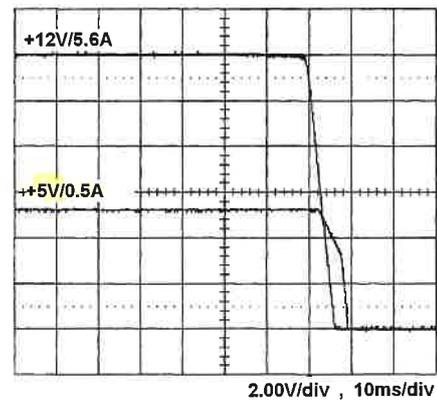


8.5 Hold-up time

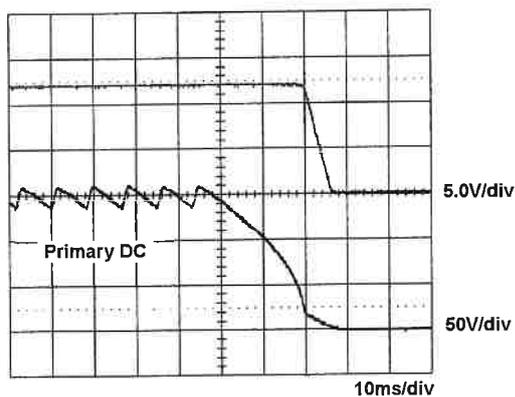

8.6 Over voltage protection

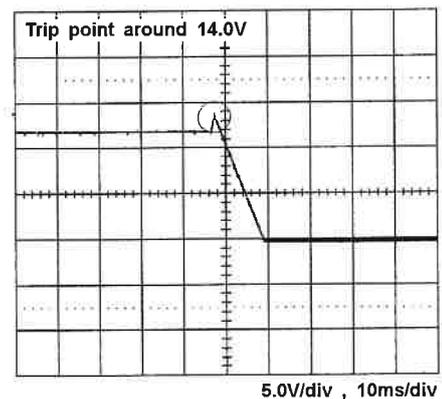


8.7 +12V step response

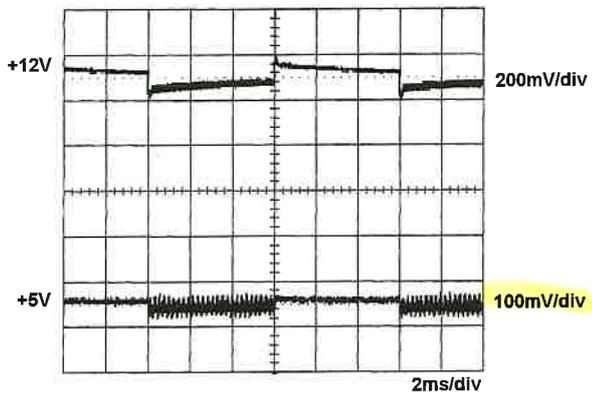

+12V step from 1.12A to 5.6A  
other output at 60% load

8.8 FCC B performance

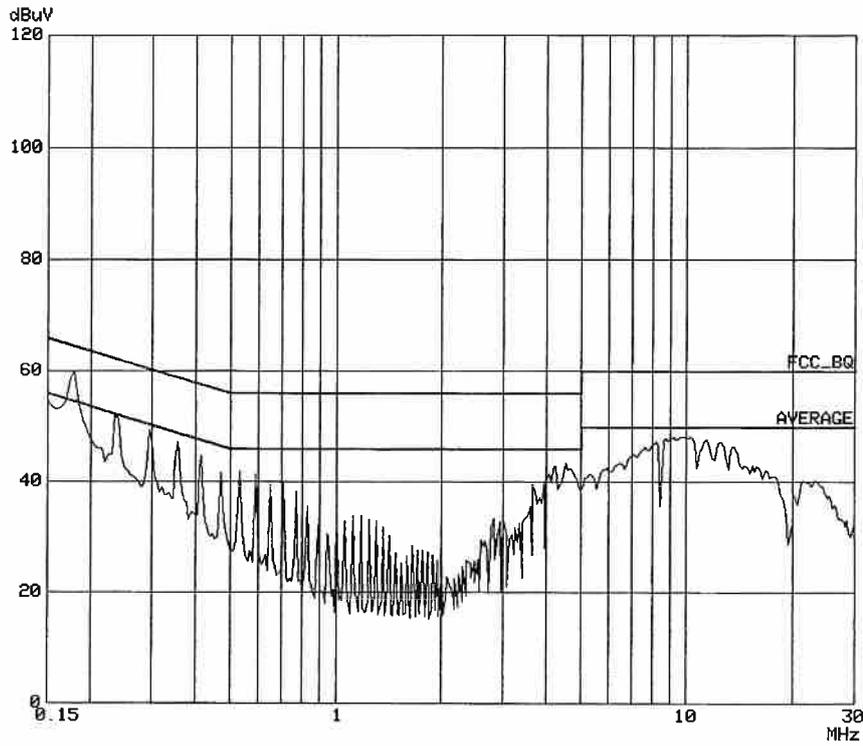

8.9 EN55011 class "B"

