

**SPECIFICATION**

and

**PERFORMANCE**

for

SWITCHING POWER SUPPLY

**M/N : SNP-Y119**

All Rights Reserved

Reviewed by Project Manager	蕭煒煒 11-20-20					
Typed by Document Assistant	蕭煒煒 11-20-20					
SKYNET ELECTRONIC			LAST REV. NO.			

## 1.0 INTRODUCTIONS

SNP-Y119 is a 110W dual output and universal input switching mode power supply. It's designed for IT, industrial and medical applications. Low density, low profile, high efficiency and high reliability are the basic features.

## 2.0 INPUT SPECIFICATIONS

### 2.1 Input Voltage

The range of input voltage is from 90VAC to 264VAC, nominal line is 115VAC/230VAC. (Label 100 ~ 240VAC)

### 2.2 Input Frequency

The range of input frequency is from 47Hz to 63Hz.

### 2.3 Input Current

The maximum input current is 3A at 115VAC or 2A at 230VAC.

### 2.4 Inrush Current

The inrush current will not exceed 30A at 115VAC input or 60A at 230VAC input cold start, 25°C.

## 3.0 OUTPUT SPECIFICATIONS

### 3.1 Load range

output	min. load	rated load	peak load	voltage accuracy
+24V	0A	4.5A	6.5A	+23.76V to +24.24V
+5V	0A	1A		+4.75V to +5.25V

At factory, the +24V output is set between +23.76V to +24.24V at 60% rated load and nominal line input, and the other outputs should be checked within the accuracy range. At peak load and nominal line, the output can last for 8 seconds without shut down.

### 3.2 Ripple and noise

The peak to peak ripple and noise for each output is less than 1% of each output voltage at rated load, nominal line. Measuring is done by 15MHz bandwidth limited oscilloscope and terminated each output with a 0.47uF capacitor.

### 3.3 Line regulation

The output line regulation, for all outputs are less than + -1% while measuring at rated load and + -10% of nominal line input voltage changing.

### 3.4 Load regulation

The load regulation for each output is less than + -1%, which are measured by changing the output load + -40% from 60% rated load, and the other outputs are kept at 60% rated load and nominal line input.

## 4.0 GENERAL FEATURES

### 4.1 Efficiency

The efficiency is 84% typ. while measuring at nominal line and rated load.

### 4.2 Hold up time

The hold up time is 20ms typ. at 115VAC input and rated load, which is measured from the end of the last charging pulse to when the main output drops down to 95% output voltage.

### 4.3 Protection

#### 4.3.1 Over voltage protection

The built-in crowbar circuit will shut down the outputs to avoid damaging the external circuits. The trip point of over voltage protection is around +26.2V to +31V. To recover from over voltage protection, cycle the AC line OFF and ON is necessary.

#### 4.3.2 Short circuit and over load protection


The power supply will generate a hiccup mode to protect itself against short circuit or over load conditions, and will automatically return to normal after fault conditions are removed.

When +5V output has the above-listed fault conditions, only itself will shut down.

## 5.0 ENVIRONMENT SPECIFICATIONS

### 5.1 Operating temperature

-20°C to 70°C (>50°C with derating as below.)

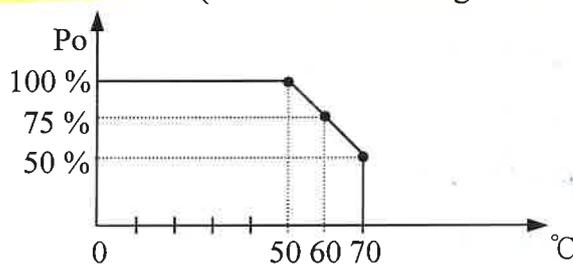

### 5.2 Storage temperature

-40°C to +75°C

### 5.3 Operating humidity

10% to 90% Non-Condensing.

### 5.4 Altitude

Will operate properly at any altitude between 0 to 6000ft.

## 6.0 INTERNATIONAL STANDARDS

### 6.1 Safety standards

Designed to meet the following regulations :

UL 60950-1

CSA 22.2 NO.60950-1

EN 60950-1

UL60601-1

CSA 22.2 NO.60601-1

EN 60601-1: 2006+A11+A1+A12

IEC60601-1: 2005+A1

### 6.2 EMI standards

Designed to meet the following limits :

FCC docket 20780 curve "B"

EN55011 class "B"

EN61000-3-2 "A"


EN61000-3-3

### 6.3 EMS standards

Designed to meet the following limits :

EN61000-4-2	8KV contact, 15KV air discharge	Criterion A
EN61000-4-3	10V/M with 80% AM	Criterion A
EN61000-4-4	4KV	Criterion A
EN61000-4-5	Line to Line 1KV ; Line to ground 2KV.	Criterion A
EN61000-4-6	10V with 80% AM	Criterion A
EN61000-4-8	30A/m	Criterion A
EN61000-4-11	30% dips 500ms,	Criterion A
	60% dips 200ms,	Criterion B
	100% dips 10ms,	Criterion A
	100% dips 20ms,	Criterion B
	100% dips 5000ms,	Criterion B

7.0 MECHANICAL SPECIFICATION

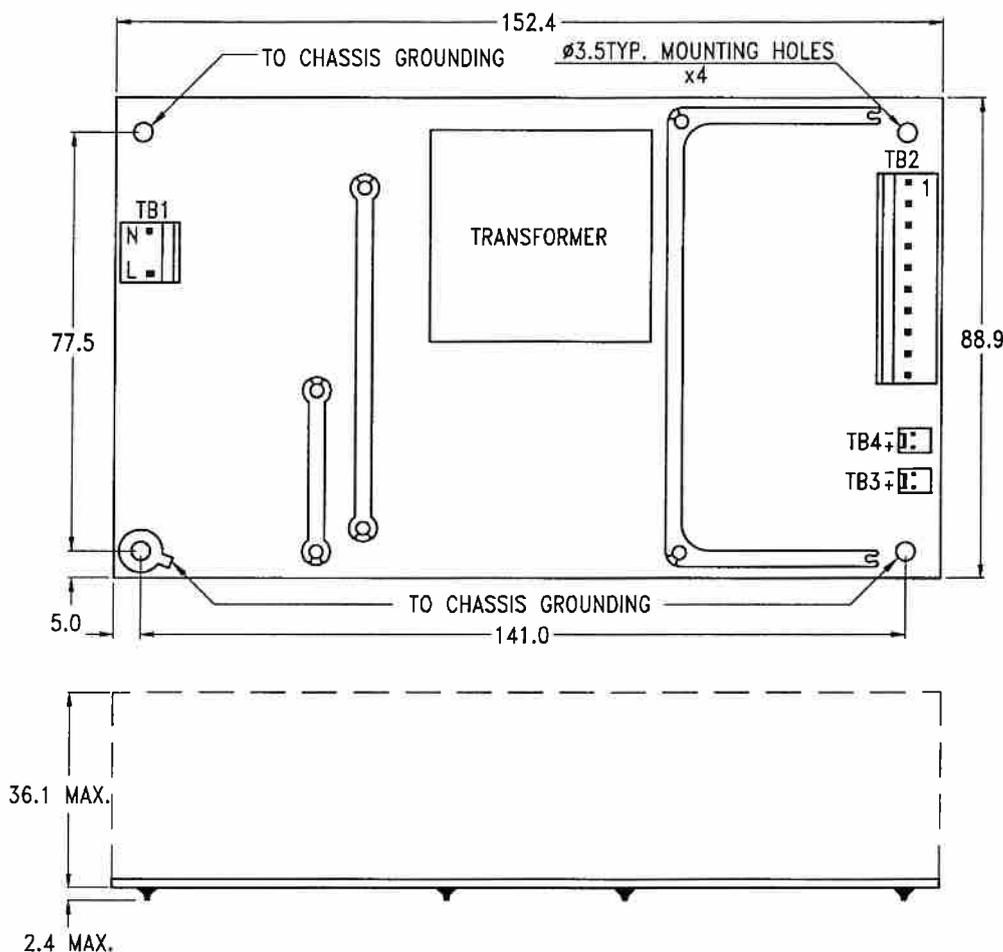

7.1 Dimensions

Dimensions shown in mm as above. Tolerance specified is + - 0.4mm.

7.2 Connectors

- TB1--AC input : Molex 5277-02A or equivalent
- TB2--DC output : Molex 5273-10A or equivalent
- TB3 for LED use only : Molex 5045-02A or equivalent
- TB4 for FAN use only : Molex 5045-02A or equivalent  
(for 24V FAN, output current 200 mA)

7.3 DC output pin assignment

PIN	1.	+24V	6.	GND
	2.	+24V	7.	GND
	3.	+24V	8.	GND
	4.	+24V	9.	+5V
	5.	GND	10.	NC



7.4 Packing

- Net weight : 320 g approx. / unit
- Carton size (mm) : 477 (L) x 290 (W) x 379 (H)
- Quantity : 32 units / carton
- Gross weight : 13.0 kg approx. / carton

8.0 PERFORMANCE (input voltage is 115VAC, unless others specified)



8.1 Switching frequency ripple

8.2 Line frequency ripple

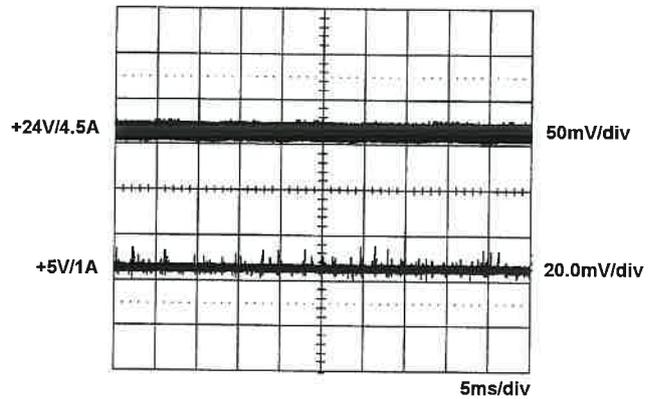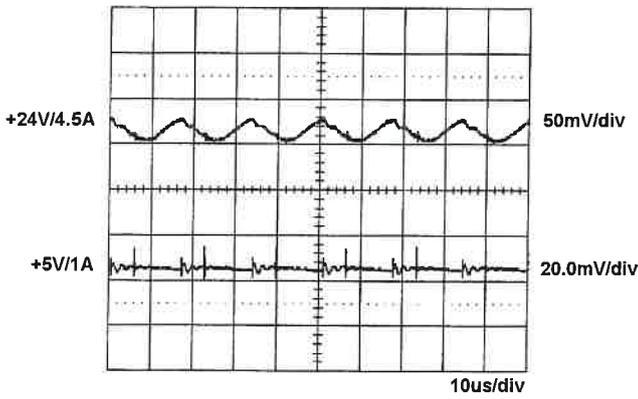



8.3 Output turn on wave form

8.4 Output turn off wave form

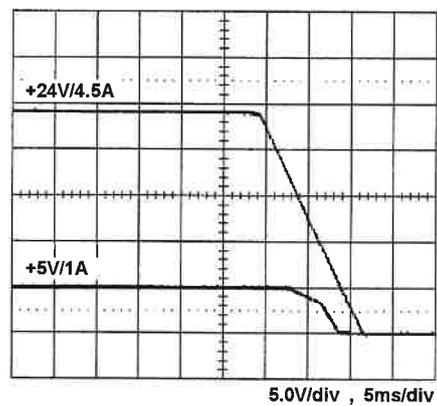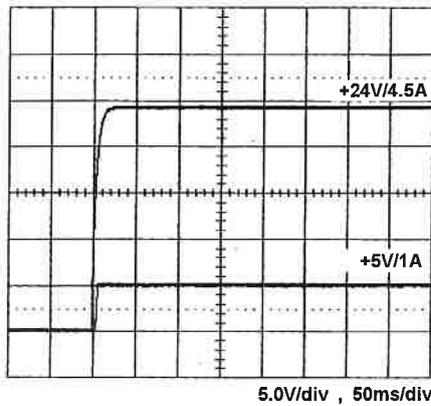


8.5 Hold-up time

8.6 Over voltage protection

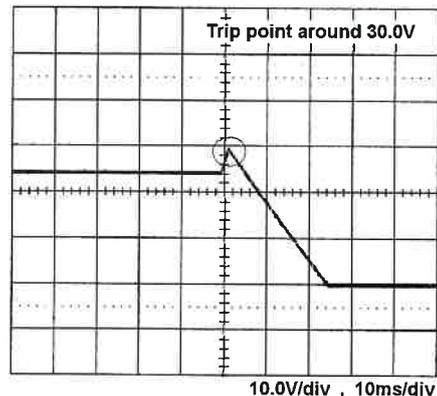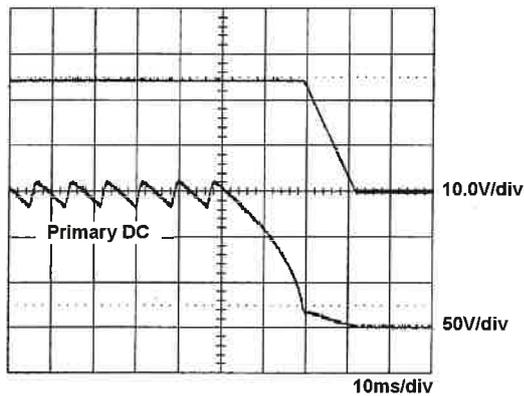


8.7 +24V step response

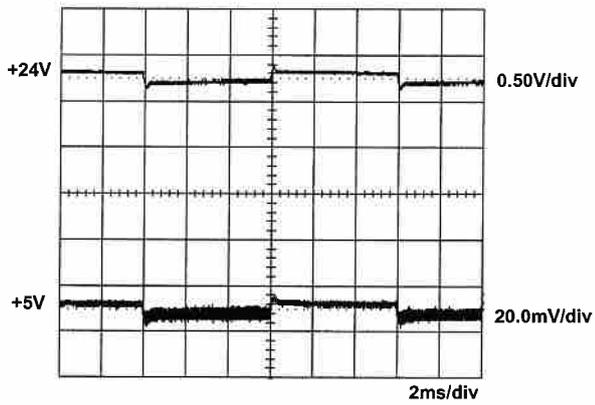

+24V step from 0.9A to 4.5A  
other output at 60% load

8.8 FCC B performance

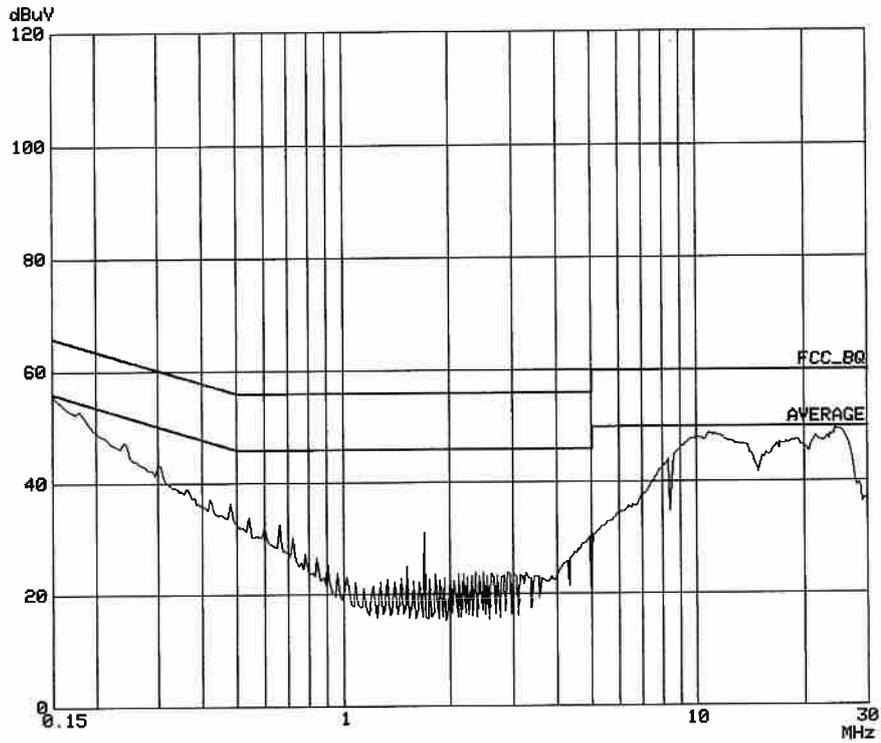

8.9 EN55011 class "B"

