

# SPECIFICATION

For

SWITCHING POWER SUPPLY

- SNP-HF89
- SNP-HF89-A
- SNP-HF89-H

STANDARD PRODUCT

Reviewed by Product Engineer	Jim 10-17-16	Jim 1-7-19				
Typed by Document Assistant	李瑞英 093016	李瑞英 010719				
<b>SKYNET ELECTRONIC</b>			<b>LAST REV. NO.</b>			

## 1.0 INTRODUCTIONS

SNP-HF89 series is an open frame 80W power supply with built-in:

- (1) Peak load (1.5 x rated current,  $V_o$ =rated for 5 sec)
- (2) Meet 2 x MOPP, Earth leakage current < 300uA and Touch current < 100uA for BF application
- (3) SNP-HF89 is with no load <0.3W green power feature, input class I
- (4) SNP-HF89-A is without burst sound, input class I
- (5) SNP-HF89-H is for home healthcare application, input class II and EMI class B
- (6) -40°C to +70°C operating temperature
- (7) 5,000m operation altitude

## 2.0 INPUT SPECIFICATIONS

### 2.1 Input voltage

Input voltage range : 90Vac to 264Vac

Nominal line voltage : 115Vac/230Vac

### 2.2 Input frequency

47Hz to 63Hz

### 2.3 Input current

$3A_{rms}$  max/115Vac,  $1.5A_{rms}$  max/230Vac

### 2.4 Inrush current

30A max/115Vac, 60A max/230Vac (EMI capacitors excluded, cold start at 25°C)

## 3.0 OUTPUT SPECIFICATIONS

All specs under item 3.0 except with special notes are defined and tested at nominal line input, rated load and 25°C

### 3.1 Load range

$V_o$	min. load	rated load	max load	peak load
+24V	0A	3.33A	4.6A	5.3A

#### 3.1.1 Factory adjustment

+23.8V to +24.2V (60% rated load, 115Vac)

#### 3.1.2 Peak load max duration

5sec. (duty cycle < 50%, average power < rated power)

#### 3.1.3 Cooling

Rated load for convection cooling ; max load for 18 CFM forced air cooling.

### 3.2 Ripple and noise

< 1% (20MHz bandwidth limited, 1X probe with 0.47uF parallel capacitor)

### 3.3 Line regulation

< ±0.5% (90Vac to 264Vac, compare with 115Vac)

### 3.4 Load regulation

< ±1% (20% to 100% rated load, compare with 60% rated load)

### 3.5 Capacitive load start-up

< 10,000uF

**4.0 GENERAL FEATURES**

All specs under item 4.0 except with special notes are defined and tested at nominal line input, rated load and 25°C

**4.1 Efficiency**

**SNP-HF89**

> 87% at 100% rated load

**SNP-HF89-A & SNP-HF89-H**

> 86% at 100% rated load

**4.2 Hold up time**

16 ms typical

**4.3 No load input power**

< 0.3W for SNP-HF89.

< 1.5W for SNP-HF89-A & SNP-HF89-H, skip burst mode for preventing audible noise.

**4.4 Protection**

**4.4.1 Over-voltage protection**

Trip point : +26V to +30V

Protection mode : Latch-off

**4.4.2 Short circuit and over-load protection**

Protection mode : Auto-recovery

**5.0 ENVIRONMENT SPECIFICATIONS**


**5.1 Operating temperature**

-40°C to 70°C


(For both rated and max load. output load derates linearly to 50% from 50°C to 70°C)

(Rated load with convection cooling; max load with 18 CFM forced air cooling)

Output derating curve

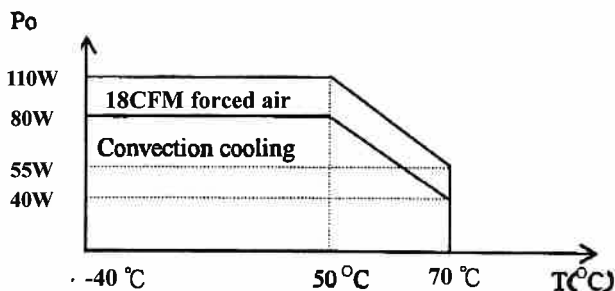

Max load fan location

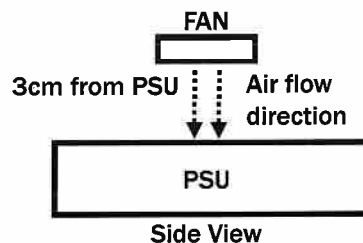

**5.2 Storage temperature**

-40°C to 85°C

**5.3 Operating humidity**

5% to 95% RH, non-condensing

**5.4 Altitude**

0 to 5000m

## 6.0 INTERNATIONAL STANDARDS

### 6.1 Safety standards

Label voltage: 100Vac to 240Vac

Designed to meet:

ITE:

UL 60950-1, 2nd Edition, 2014-10-14

CAN / CSA C22.2 No.60950-1-07 2nd Edition , 2014-10

IEC 60950-1:2005+A1+A2

EN 60950-1:2006+A11+A1+A12+A2

Medical:

3.1 Edition:

ANSI /AAMI ES60601-1(2005 / (R) 2012+A1:2012, C1:2009 / (R) 2012+A2:2010 / ( R) 2012)

CAN/CSA-C22.2 No.60601-1:14

IEC 60601-1:2005+A1

EN 60601-1:2006+A11+A1+A12

3rd Edition:

ANSI /AAMI ES 60601-1(2005+C1:09+A2:10)

CAN/CSA-C22.2 No. 60601-1(2008)

IEC 60601-1:2005

EN 60601-1:2006+A11+A12

2nd Edition:

UL 60601-1 , 1st Edition

CAN/CSA-C22.2 No.601.1-M90,2005

IEC 60601-1:1988+A1+A2

EN 60601-1:1990+A1+A2+A13

### 6.2 EMI standards

FCC docket 20780 curve "B"

EN55022, level "B"

EN55011, level "B"

EN 61000-3-2 class "A"

EN 61000-3-3


### 6.3 EMS standards

EN61000-4-2	8kV/contact discharge, 15kV/air discharge	Criterion A
EN61000-4-3	10V/M with 80% AM	Criterion A
EN61000-4-4	2Kv (10KHz)	Criterion A
EN61000-4-5	2kV/Line-Line, 4kV/Line-Earth	Criterion A
EN61000-4-6	10V with 80% AM	Criterion A
EN61000-4-8	30A/m	Criterion A
EN61000-4-11	100% dips 10ms,	Criterion A
	100% dips 20ms,	Criterion B
	30% dips 500ms,	Criterion A
	60% dips 200ms,	Criterion B
	100% dips 5000ms,	Criterion B




8.0 PERFORMANCE (input voltage is 115VAC, unless others specified)


8.1 Switching frequency ripple

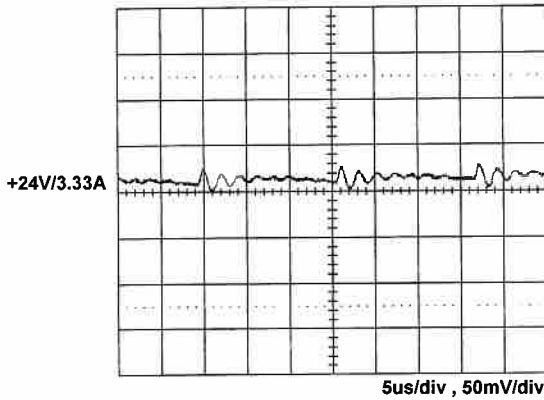


8.2 Line frequency ripple

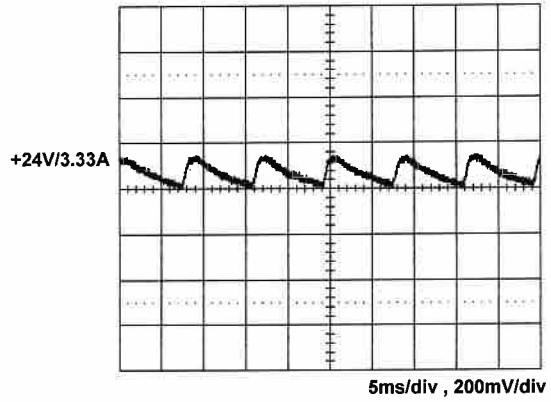


8.3 Output turn on wave form

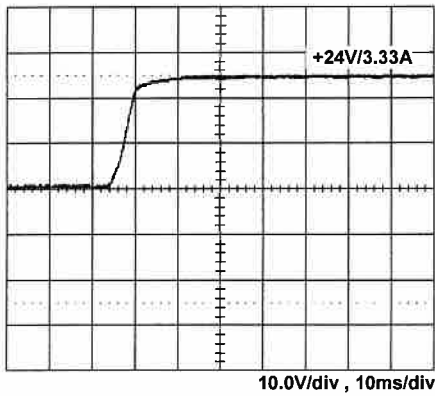


8.4 Output turn off wave form

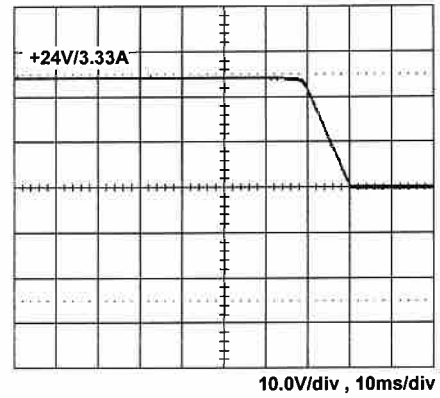


8.5 Hold-up time

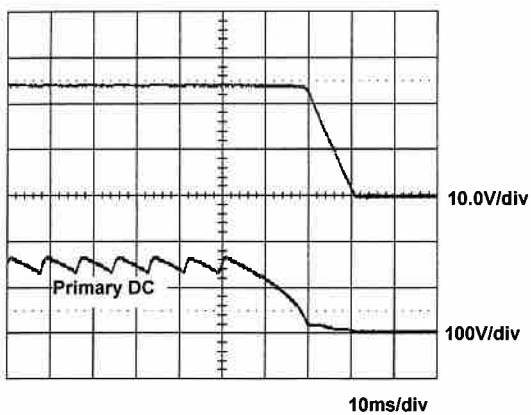

8.6 Over voltage protection

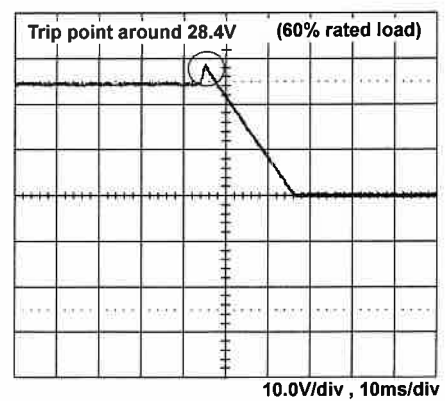


8.7 +24V Step response

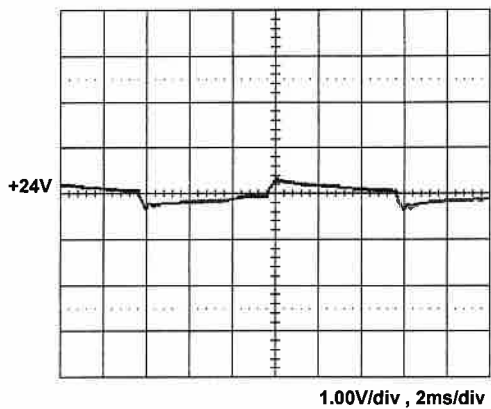


+24V step from 0.67A to 3.33A

8.8 FCC B performance class I

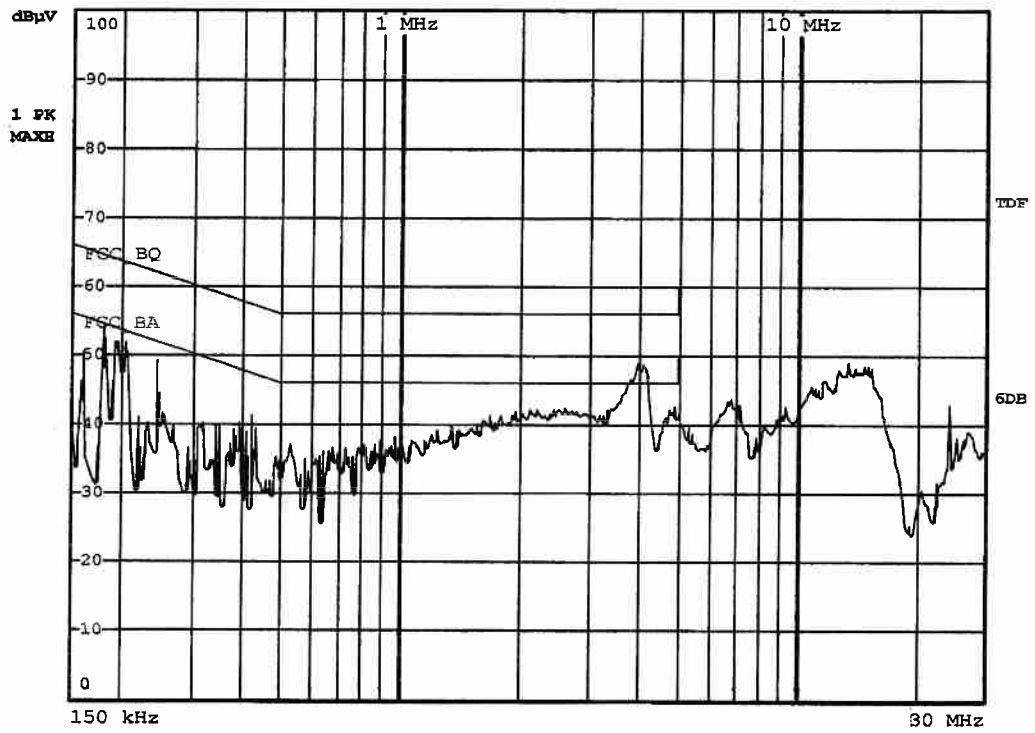


8.9 EN55011 22 "B" class I

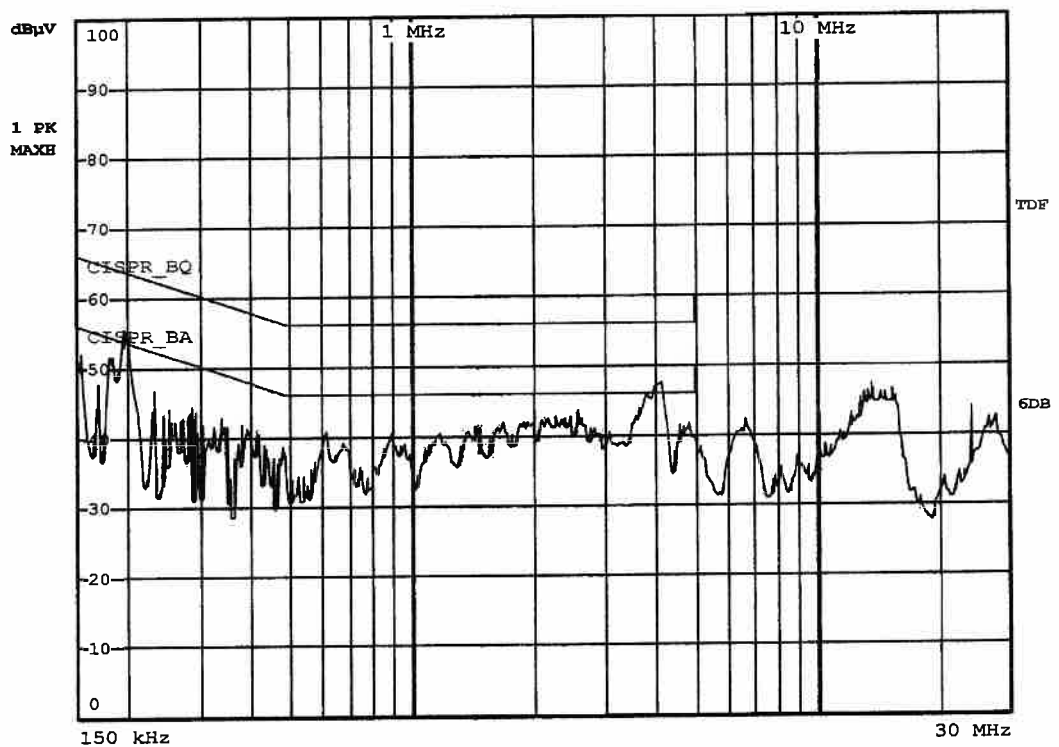



8.10 FCC B performance class II

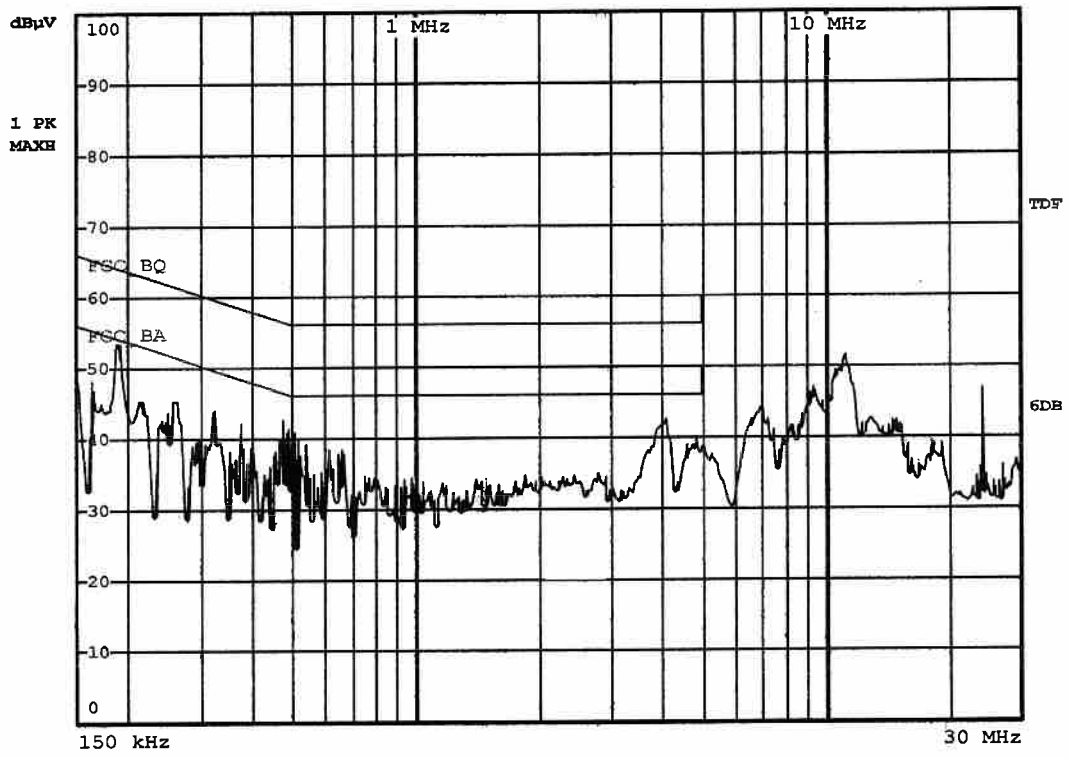

8.11 EN55011 22 "B" class II

