# **SPECIFICATION**

For

SWITCHING POWER SUPPLY

M/N: SNP-A207

STANDARD PRODUCT

					-	
Reviewed by	2512	efolex _	£ XXX	DT W	ak-JEX	# > 97
Product Manager	49 78 2 Salar 10	XX237411	2 A Cossisi	783 Bonis	A 13821	5330 3818;
Typed by	圣徒奏	多待菜	弘安太	真武落	高林春	陳誼素
Document Assistant	08/23/10	03/23/11	05/17/11	671111	07-811	8/8-11
CHANNID TO		DONIC	LAST REV.	NO.		
SKYNET	ELECT	KUNIC			*1	

#### 1.0 INTRODUCTIONS

SNP-A207 is a Class I input and 180W rated / 400W peak output switching mode desktop adaptor with active PFC. Low no-load input power (<0.5W) and high average efficiency in active mode ( $\ge$ 87%) complies with the EPA energy star stage V requirements. Also, the safety conformity covers IT application.

#### 2.0 INPUT SPECIFICATIONS

# 2.1 Input Voltage

The range of input voltage is  $90\text{VAC} \sim 264\text{VAC}$ , nominal line is 115V/230V. This is class I power supply.

#### 2.2 Input Frequency

The range of input frequency is 47Hz ~ 63Hz.

### 2.3 Input Current

The maximum input current is 5A at 115VAC or 3A at 230VAC.

#### 2.4 Inrush Current

The inrush current will not exceed 30A at 115VAC input or 60A at 230VAC input, with cold start, 25°C, with exclusion of EMI suppression capacitors.

# 2.5 No-load input power

No-load input power is less than 0.5W at nominal line.

#### 2.6 Power Factor

PF>0.9 at 115Vac/230Vac and rated load.

#### 3.0 OUTPUT SPECIFICATIONS

#### 3.1 Load range

output	min. load	rated load	peak load	voltage accuracy
+12V	0A	16A	33.4A	+11.0V to +12.6V

At factory, +12V output is set between +11.9V to +12.1V at 60% rated load and nominal line input.

\*Peak load is not promised to use over 10 sec. at nominal line, otherwise the life-time will be reduced.

# 3.2 Ripple and noise

The peak to peak ripple and noise for each output is less than 120mV at rated load, nominal line. Measuring is done by 20MHz bandwidth limited oscilloscope and terminated each output with a 0.47uF +10uF capacitor.

#### 3.3 Line regulation

The line regulation is less than + -0.5% while measuring at rated load and + -10% of nominal line input voltage changing.

#### 3.4 Load regulation

The load regulation is less than + -3% which is measured by changing the output load + -40% from 60% rated load at nominal line input.

#### 4.0 GENERAL FEATURES

## 4.1 Efficiency

The efficiency is 87% typ. while measuring at nominal line and rated load. Also, the average efficiency in active mode is higher than 87%. while measuring at nominal line. (100% > 75% > 50% and 25% of rated load)

## 4.2 Hold up time

The hold up time is higher than 16mS at 115VAC input and rated load, which is measured from the end of the last charging pulse to when the main output drops down to 95% output voltage.

#### 4.3 Protection

# 4.3.1 Over voltage protection

The build-in crowbar circuit will shut down the outputs to avoid damaging the external circuits. The trip point of over voltage protection is around +13.1V to +15.1V. To recover from over voltage protection, cycle the AC line OFF and ON is necessary.

#### 4.3.2 Short circuit and over load protection

The power supply will generate a hiccup mode to protect itself against short circuit or over load conditions, and will automatically return to normal after fault conditions are removed.

#### 5.0 ENVIRONMENT SPECIFICATIONS

## 5.1 Operating temperature

-20°C to 60°C,-20 °C to 40 °C no derating ,above 40 °C, derate at 2.5% per degree from 40 °C to 60 °C.

#### 5.2 Storage temperature

-40°C to 80°C

# 5.3 Operating humidity

10% to 95% Non-Condensing

#### 5.3 Altitude

Will operate properly at any altitude between 0 to 3000m.

# 6.0 INTERNATIONAL STANDARDS

# **6.1 Safety standards**(Label Volatge100 ~ 240VAC)

Designed to meet the following regulations:

UL 60950-1

CSA 22.2 NO.60950-1

EN 60601-1 EN 60950-1

#### 6.2 EMI standards

Designed to meet the following limits:

FCC docket 20780 curve "B"

EN55011 class "B"

EN61000-3-2 class D

EN61000-3-3

#### 6.3 EMS standards

Designed to meet the following limits:

EN61000-4-2	4KV contact, 8KV air o	lischarge	Criterion A
EN61000-4-3	10V/M with 80% AM		Criterion A
EN61000-4-4	2KV		Criterion A
EN61000-4-5	Line to Line 1KV		Criterion A
	Line to Ground 2KV		Criterion A
EN61000-4-6	3V with 80% AM		Criterion A
EN61000-4-8	3A/M		Criterion A
EN61000-4-11	30% dips 10ms	Criterion A	
	60% dips 100ms	Criterion C	
	100% dips 5000ms	Criterion C	


# 6.4 Energy saving standards

Designed to meet the following standard:

Energy Star Ver. 2.0 Level V

CEC Level V

## 7.0 Mechanical specification

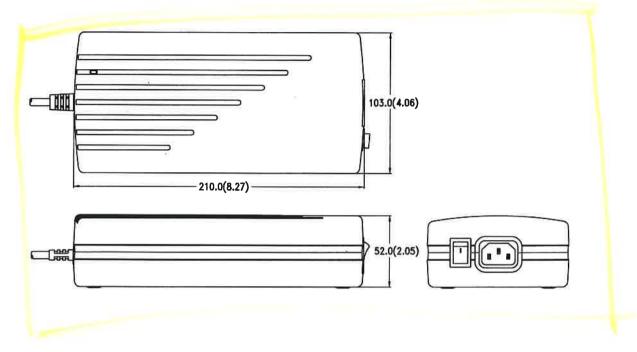

#### 7.1 Dimensions

Dimensions shown in mm(inch) as above. Tolerance specified is + -1mm.

# 7.2 Connectors

AC inlet: Meet IEC60320-1 C14 standard.

DC output: MOLEX 5557-06 or equivalent (Cable length: 1.5M approx.)

#### 7.3 Switch


Rock switch

# 7.4 Power on indicator: Green light

Green light on top of box.

#### 7.5 Case color: Black

# 7.6 DC output cable and pin assignment



# 7.5 Packing

Net weight

: 1.1kg approx. / unit

Carton size (mm)  $: 412(L) \times 336 (W) \times 387(H)$ 

Quantity


: 10 units / carton

Gross weight


: 14.0kg approx. / carton

# **8.0 PERFORMANCE** (input voltage is 115VAC, unless others specified)


# 8.1 Switching frequency ripple

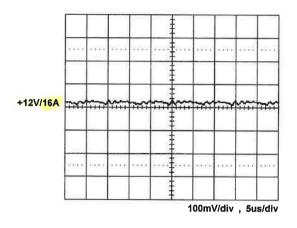


# 8.2 Line frequency ripple

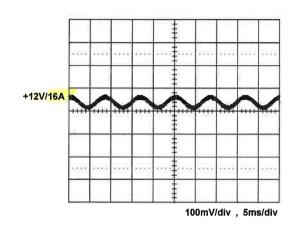


# 8.3 Output turn on wave form




8.4 Output turn off wave form




# 8.5 Hold-up time

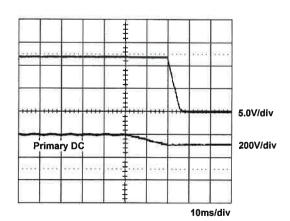


# 8.6 Over voltage protection




# 8.7 +12V step response

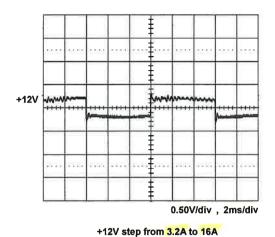

8.8 Peak Load

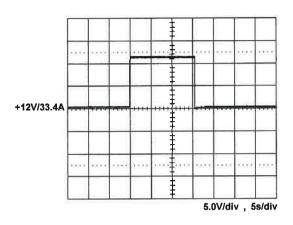

# 8.8 FCC "B" performance

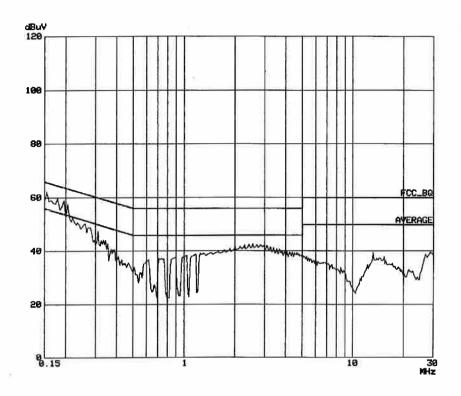

# 8.9 EN 55022 "B"

